




EL 71

FEATURES

- Low service costs
- Long life
- Available in all climate classes

| EL |

RELIABLE STORAGE

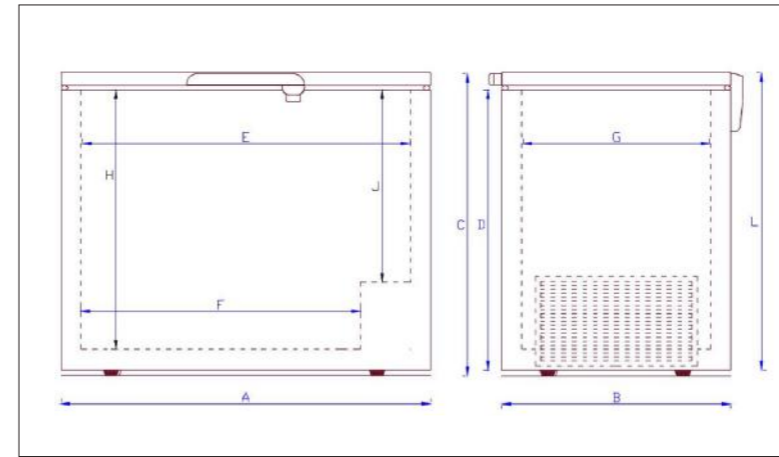

EL 12



EL 22



EL 35



EL 45



EL 53



EL 61

| | EL 12 | EL 22 | EL 35 | EL 45 | EL 53 | EL 61 | EL 71 |
|---|-------------|-------------|--------------|--------------|--------------|--------------|--------------|
| Ambient temperature (Celsius) | +10 to +30 | +10 to +30 | +10 to +30 | +10 to +30 | +10 to +30 | +10 to +30 | +10 to +31 |
| Gross volume, litres | 110 | 215 | 347 | 447 | 527 | 607 | 701 |
| Net volume, litres | 98 | 205 | 331 | 427 | 504 | 580 | 670 |
| Temperature range inside unit | -14 to -22 | -14 to -22 | -14 to -22 | -14 to -22 | -14 to -22 | -14 to -22 | -14 to -22 |
| Refrigerant | R600 a | R134 a | R134 a | R134 a | R134 a | R134 a | R134 a |
| Input power (watt): | 52 | 124 | 141 | 146 | 211 | 211 | 245 |
| Energy consumption / 24 h (kwh) at 18 deg | 0,49 | 0,71 | 0,9 | 1,05 | 1,3 | 1,52 | 1,95 |
| DIMENSIONS | | | | | | | |
| External dimensions (wxdxh) | 550*550*860 | 720x650x860 | 1050x650x860 | 1300x650x860 | 1500*650*860 | 1700*650*860 | 1800x690x860 |
| Dimension A | 550 | 720 | 1050 | 1300 | 1500 | 1700 | 1800 |
| Dimension B | 550 | 650 | 650 | 650 | 650 | 650 | 690 |
| Dimension C | 860 | 860 | 860 | 860 | 860 | 860 | 860 |
| Dimension D | | 780 | 780 | 780 | 780 | 780 | 780 |
| Dimension E | 420 | 606 | 936 | 1186 | 1386 | 1586 | 1686 |
| Dimension F | | 406 | 736 | 986 | 1186 | 1386 | 1486 |
| Dimension G | 420 | 536 | 536 | 536 | 536 | 536 | 576 |
| Dimension H | | 750 | 750 | 750 | 750 | 750 | 750 |
| Dimension J | | 500 | 500 | 500 | 500 | 500 | 500 |
| Dimension L | | 850 | 850 | 850 | 850 | 850 | 850 |
| Insulation ,mm | 65 | 60 | 60 | 60 | 60 | 60 | 60 |
| ASCESSORIES | | | | | | | |
| Dividers | n/a | Optional | Optional | Optional | Optional | Optional | |
| Baskets included | 1 | 1 | 2 | 2 | 3 | 3 | 3 |
| Max. Number of basket possible | 1 | 1 | 2 | 3 | 4 | 4 | 6 |
| Castors | n/a | Optional | Optional | Optional | Optional | Optional | Optional |
| Castors w. brakes | n/a | Optional | Optional | Optional | Optional | Optional | Optional |
| Lock | n/a | Included | Included | Included | Included | Included | Included |
| OTHER DATA | | | | | | | |
| Outer cabinet | White | White | White | White | White | White | White |
| Inner cabinet | | Aluminium | Aluminium | Aluminium | Aluminium | Aluminium | Aluminium |
| Type of cooling | Static | Static | Static | Static | Static | Static | Static |
| Type of defrost | Manual | Manual | Manual | Manual | Manual | Manual | Manual |
| Power | 220v/50 hz | 220V/50Hz | 220V/50hz | 220V/50hz | 220V/50hz | 220V/50hz | 220V/50hz |
| Power 110volt / 60 hz | n/a | Optional | Optional | Optional | Optional | Optional | Optional |
| Thermostat | Mechanical | Mechanical | Mechanical | Mechanical | Mechanical | Mechanical | Mechanical |
| Freezing capacity kg/ 24 h | 6,5 | 15 | 22 | 27 | 36 | 38 | 43 |
| Light in Lid | Included | Included | Included | Included | Included | Included | Included |
| Calendar in Lid | n/a | Included | Included | Included | Included | Included | Included |
| Net weight, kg | 31 | 43 | 54 | 64 | 67 | 77 | 85 |
| Gross weight, kg | 34 | 46 | 58 | 68 | 71 | 82 | 89 |
| SHIPPING | | | | | | | |
| 20' cont. Capacity | | 42 | 30 | 24 | 20 | 18 | 14 |
| 40' cont. Capacity | | 90 | 64 | 50 | 46 | 40 | 30 |
| 40' HC cont. Capacity | 228 | 126 | 88 | 70 | 61 | 52 | 42 |
| Standard Trailer capacity | 276 | 102 | 74 | 60 | 52 | 44 | 42 |